# DORADO

## IP54/65 Square Luminaire

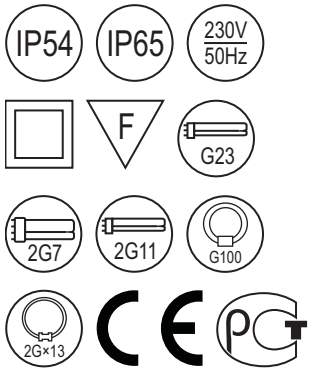

| | |
|---|---|
| **Type:** | Surface-mounted square fluorescent luminaire with slim profile. |
| **Specification:** | Durable opal PMMA diffuser with outstanding resistance to chemical influences<br>White polycarbonate body. Sealing gasket in IP65 version.<br>Luminaire is boxed individually. |
| **Installation:** | Designed to be fixed onto ceilings or walls of any type, including flammable surfaces. |
| **Application:** | Ideal for common areas in hospitals, swimming pools, bathrooms and etc. |

| Type | Lamp (W) and socket | IP level | Overall dimensions, mm | Weight, kg | Total wattage, W |
|---|---|---|---|---|---|
| Dorado 109 H27 | 1×9 (TC-S, G23) | IP54 | 200×200×58 | 1,1 | 16 |
| Dorado 209 H28 | 2×9 (TC-S, G23) | IP54 | 200×200×58 | 1,2 | 32 |
| Dorado B 211 H29 | 2×11 (TC-S, G23) | IP65 | 300×300×83 | 2 | 36 |
| Dorado B 218 H30 | 2×18 (TC-L, 2G11) | IP65 | 300×300×83 | 2 | 52 |
| Dorado B 122 H31 | 1×22 (T9 C, G10Q) | IP65 | 300×300×83 | 2 | 30 |
| Dorado B 211 H32 HF | 2×11 (TC-SE, 2G7) | IP65 | 300×300×83 | 1,7 | 20 |
| Dorado B 218 H33 HF | 2×18 (TC-L, 2G11) | IP65 | 300×300×83 | 1,7 | 28 |
| Dorado B 122 H34 HF | 1×22 (T5 FC, 2G×13) | IP65 | 300×300×83 | 1,7 | 25 |

**Options available on request:**

HF – High Frequency control gear
DIM – Dimmable ballasts
DALI – DALI ballasts
EMG – Emergency version 1 hour
EM2 – Emergency version 2 hour
EM3 – Emergency version 3 hour
4TB – 4 way terminal block for loop feed and ease of wiring
5TB – 5 way terminal block for loop feed and ease of wiring
NCP – Low Power Factor
PC – Polycarbonate diffuser